

DTC3 absolute and gauge pressure transmitter



Key features

- True analog design – no microprocessor or firmware/software
- Dustproof and waterproof construction, no humidity effect
- Mounted using the Rosemount 1151 mounting bracket
- Local test points for field adjustability
- No special tools required for installation

Overview

The DTC3 is an analog differential pressure transmitter designed and manufactured by Curtiss-Wright for non-safety nuclear applications. It is a drop-in replacement for the almost ubiquitous but now discontinued Rosemount™ 1151 analog pressure transmitter. The DTC3 provides precision pressure measurements in applications requiring reliable performance and functional safety. It has a true analog design with no microprocessors, firmware or required software and was developed to offer differential, gauge and absolute pressure measurement. With reduced calibration times, the DTC3 offers significantly reduced installation times.

Technical data

| Feature | Description |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reference accuracy | ±0.2% span, includes combined effects of linearity, hysteresis, deadband, settability and repeatability |
| Drift | ±0.25% of URL for six months |
| Temperature effects | ±0.5% URL +0.5% of span temperature effect per 100°F (56°C) |
| Overpressure effects | ±0.25% URL - over pressure limit is 2x |
| Electromagnetic compatibility | European EMC Directive 2014/30/EU by conforming to applicable EN and IEC Standards: compliance testing to the EN 61000 Series standards, CE Marking, declaration of conformity |
| Load effect | With limits set by the line voltage, the output current is independent of load resistance |
| Power supply effects | 0.005% of calibration span/volt |
| Power supply and load limits (10-50 mA option available) | Operating region: 4-20 mA: 12-45 VDC 10-50 mA: 30-85 VDC |
| Span and zero | Continuously adjustable external to the electronics, non-interacting |
| Zero elevation, zero suppression | Elevated zero and zero suppression must be factory set in order to achieve the specified temperature performance |
| Direct or reverse acting | Factory set |
| Range-down | 6 to 1 (Min. span is 16.7% URL) |
| Output 4-20 mA standard | Low saturation <3.8 mA, high saturation 21 mA, supply voltage 12-45 Vdc |

Technical data

| Feature | Description |
|----------------------------|-------------------------------------------------------------------------------------------------|
| Output 10-50 mA option | Low saturation <8 mA, high saturation 52.4mA, supply voltage 30-85 Vdc |
| Temperature limits | 0°F-185°F (-17.8°C to 85°C). Storage limits: -40°F to 212 °F (-40°C to 100°C) |
| Volumetric displacement | Less than 0.01 cubic inches (0.16 cubic centimeters) |
| Enclosure Rating | NEMA 4X (IP 66) |
| Response Time | 0.2 second sensor response time to 50% with a 100% of span step change |
| Humidity limits | 0 to 100% relative humidity (NEMA 4X) |
| Turn-on time | 5 seconds for 99%;1 minute for rated accuracy |
| Over pressure limit | 2 x URL |
| Diaphragm sensor | 15.5 SST |
| Drain vent valve | 316 SST |
| Process flange | 316 SST |
| Process seal | EPDM |
| Electronics housing O-ring | BUNA-N |
| Fill fluid | Silicone oil: DC550 standard, DC200 optional (faster response), no fill fluid on the AP capsule |

Technical data

| Feature | Description |
|---------------------------|------------------------------------------------------------------------------------------------|
| Sensor module housing | 316 SST |
| Flange Bolt | Medium carbon alloy steel, SAE J429, grade 8, zinc yellow-chromate plated finish per ASTM B633 |
| Electronics housing | Low-copper aluminum with polyurethane paint |
| Mounting bracket | 316L SST |
| Mounting bolts | Stainless steel |
| Process connections | ¼-18 NPT standard, optional welded fittings or process adapters; IEC 61518 compliant |
| Electrical Connections | Half inch NPT conduit with screw terminals, standard |
| Weight (transmitter only) | 14.7 lbs (6.7 kg) |
| Cable | Quick disconnect connector (QDC) mating cable |
| Gauge sensor technology | Advanced thin film metal strain |
| Further options | Loop powered, 2 wire, 4-20 mA, 10-50mA available |

DTC3 model matrix

| Model | Transmitter type | DP | GP | AP |
|---------------------------------|----------------------------------------------------------|----|----------------|----|
| DTC3DP | Differential pressure transmitter ¹ | ● | | |
| DTC3GP | Gauge pressure transmitter ² | | ● | |
| DTC3AP | Absolute pressure transmitter ² | | | ● |
| Capsule URL | | DP | GP | AP |
| 10 | 30 inH ₂ O, 7.46kPa, 74.6 mBar | ● | ● ³ | |
| 20 | 150 inH ₂ O, 37.3 kPa, 373 mBar | ● | ● ³ | |
| 30 | 750 inH ₂ O, 186.5 kPa, 1865 mBar | ● | ● ³ | |
| 40 | 2770 inH ₂ O (100 psi) , 689.5 kPa, 6.895 Bar | | ● | ● |
| 50 | 300 psia/g, 2.068 MPa, 20.68 Bar | | ● | ● |
| 60 | 1000 psia/g, 6.895 MPa, 68.95 Bar | | ● | ● |
| 70 | 3000 psia/g, 20.68 MPa, 206.8 Bar | | ● | ● |
| 80 | 6000 psia/g, 41.4 MPa, 414 Bar | | ● | ● |
| Transmitter output (select one) | | DP | GP | AP |
| E | 4-20 mA output with variable damping | ● | ● | ● |
| G | 10-50 mA output with variable damping | ● | ● | ● |

1. Transmitter is supplied with aluminum housing, 316 SS Flange and Diaphragm, 316 SS Bleed Valves, Plated Carbon Steel Bolts, and Silicone Fill Fluid.

2. Transmitter is supplied with aluminum housing, 316 SS Flange, 15/5 SS Diaphragm, Plated Carbon Steel Bolts, and Silicone Fill Fluid (GP only).

3. DP transmitter with low side screen vented to atmosphere in order to function as a GP transmitter.

4. Transmitter is supplied with direct acting output standard.

5. Transmitter is supplied with a terminal block electrical connection standard.

6. Transmitter is supplied with a 1/4" NPT process connection standard.

7. Transmitter is supplied with bleed valves installed and no side drain/vent standard.

DTC3 model matrix

| Options | | DP | GP | AP |
|----------------------------------------------------------------|------------------------------------------------------------------------------------|----|----|----|
| Transmitter output action ⁴ | | | | |
| R | Reverse acting output | ● | ● | ● |
| Electrical Connection with dual cavity AI housing ⁵ | | | | |
| C1 | QDC | ● | ● | ● |
| C2 | Seal gland | ● | ● | ● |
| C3 | Souriau 8N45 connector | ● | ● | ● |
| C4 | Harting connector | ● | ● | ● |
| Mounting bracket | | | | |
| B0 | DP universal mounting bracket (components for 2" pipe and panel mounting included) | ● | ● | ● |
| Process connection ⁶ | | | | |
| P1 | Welded 3/8" Swagelok process fitting | ● | ● | ● |
| P2 | 1/2" process connection adapter (football) | ● | ● | ● |
| P3 | 1/4" process connection adapter (football) | ● | ● | ● |
| Drain/vent ⁷ | | | | |
| D1 | Side drain/vent top | ● | ● | ● |
| D2 | Side drain/vent bottom | ● | ● | ● |
| Remote seals/capillaries | | | | |
| RS | Consult factory (additional information required) | ● | ● | ● |



DTC3DP - [30 | G | R] - [B0 | P2 | D1]
DTC3 Differential Pressure Transmitter, 750 inH₂O Range, 10-50 mA Output, Reverse Acting, Terminal Block
Electrical Connection (no code), Universal Mounting Bracket, 1/2" Process Connection Adapter, Side Drain/Vent Top.

DTC3GP - [50 | E] - [C1 | B0 | P1]
DTC3 Gauge Pressure Transmitter, 3000 psi Range, 4-20 mA output, Direct Acting (no code), EGS Connector,
Universal Mounting Bracket, Welded 3/8" Swagelok Process Fitting.

DTC3AP - [70 | E] - [B0 | D2]
DTC3 Gauge Pressure Transmitter, 3000 psi Range, 4-20 mA output, Direct Acting (no code), Terminal Block
Electrical Connection (no code), Universal Mounting Bracket, Side Drain/Vent Bottom.

Technical specifications

Power supply and load limits

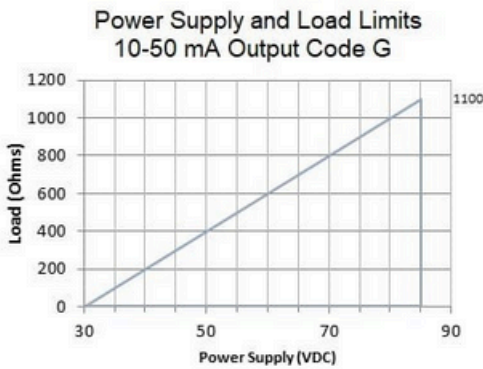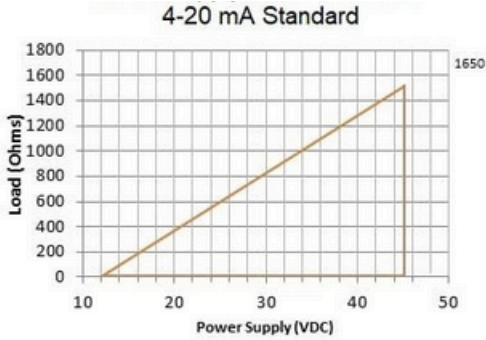

Specifications subject to change

Specification is subject to change without notice. Transmitters are factory calibrated to the customer's specified range. If calibration is not specified, the transmitters are calibrated at maximum range. Calibration is performed at ambient temperature and pressure.

AP/GP ranges and limits


| | Range Code | URL | Span Range | Static Pressure / Overpressure |
|-------|------------|------------------------|-------------------------------|--------------------------------|
| GP* | 10 | 30 inH ₂ O | 5 to 30 inH ₂ O | 2550 psi |
| GP* | 20 | 150 inH ₂ O | 25 to 150 inH ₂ O | 2550 psi |
| GP* | 30 | 750 inH ₂ O | 125 to 750 inH ₂ O | 2550 psi |
| GPIAP | 40 | 100 psi | 16.7 to 100 psi | 200 psi |
| GPIAP | 50 | 300 psi | 50 to 300 psi | 600 psi |
| GPIAP | 60 | 1000 psi | 166.7 to 1000 psi | 2000 psi |
| GPIAP | 70 | 3000 psi | 500 to 3000 psi | 6000 psi |
| GPIAP | 80 | 6000 psi | 1000 to 6000 psi | 9000 psi |

| | Range Code | URL | Span Range | Static Pressure / Overpressure |
|-------|------------|-----------|--------------------|--------------------------------|
| GP* | 10 | 7.46 kPa | 1.24 to 7.46 kPa | 17.58 MPa |
| GP* | 20 | 37.3 kPa | 6.22 to 37.3 kPa | 17.58 MPa |
| GP* | 30 | 186.5 kPa | 31.1 to 186.5 kPa | 17.58 MPa |
| GPIAP | 40 | 689.5 kPa | 114.9 to 689.5 kPa | 1.38 MPa |
| GPIAP | 50 | 2.068 MPa | 0.34 to 2.068 MPa | 4.14 MPa |
| GPIAP | 60 | 6.895 MPa | 1.15 to 6.895 MPa | 13.8 MPa |
| GPIAP | 70 | 20.68 MPa | 3.45 to 20.68 MPa | 41.4 MPa |
| GPIAP | 80 | 41.4 MPa | 6.9 to 41.4 MPa | 62.05 MPa |

| | Range Code | URL | Span Range | Static Pressure / Overpressure |
|-------|------------|-----------|-------------------|--------------------------------|
| GP* | 10 | 74.6 mBar | 12.4 to 74.6 mBar | 175.8 Bar |
| GP* | 20 | .373 Bar | .062 to .373 Bar | 175.8 Bar |
| GP* | 30 | 1.865 Bar | .311 to 1.865 Bar | 175.8 Bar |
| GPIAP | 40 | 6.895 Bar | 1.15 to 6.895 Bar | 13.79 Bar |
| GPIAP | 50 | 20.68 Bar | 3.4 to 20.68 Bar | 41.37 Bar |
| GPIAP | 60 | 68.95 Bar | 11.5 to 68.95 Bar | 137.9 Bar |
| GPIAP | 70 | 206.8 Bar | 34.5 to 206.8 Bar | 413.7 Bar |
| GPIAP | 80 | 413.7 Bar | 68.9 to 413.7 Bar | 620.5 Bar |

*DP configured to operate as a GP.

DTC3 dimensions

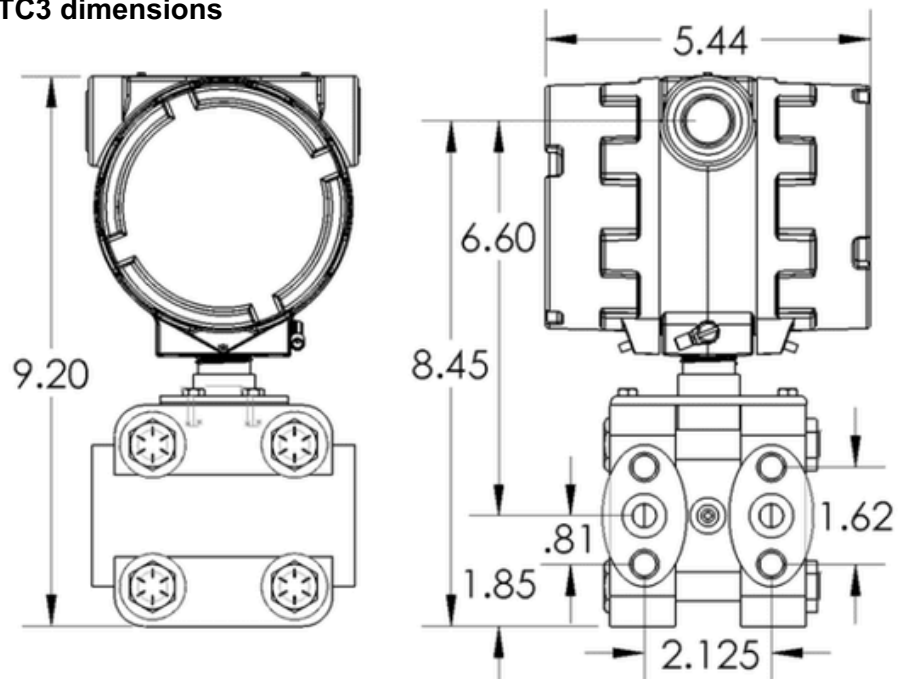

United States of America

707 Jeffrey Way
Round Rock
Texas 78665-2408
USA

Tel: +1 512-434-2800

United Kingdom

Innovation House
Lancaster Road
Ferndown Industrial Estate
Wimborne
Dorset BH21 7SQ
UK

Tel: +44 (0) 1202 850 450

For more information

Web: cwic.curtisswright.com

Email: sales@nspi.curtisswright.com

About Curtiss-Wright

Curtiss-Wright Round Rock and Wimborne have worked with nuclear and industrial customers for over 60 years. We support customers across the world from facilities located in the US and UK. Our solutions are embedded in strategic national infrastructure and our people are active partners in customer programs that are focused on delivering advanced future nuclear and industrial capabilities.

Curtiss-Wright Corporation (NYSE: CW) is a global integrated business that provides highly engineered products, solutions and services mainly to Aerospace & Defense markets, as well as critical technologies in demanding commercial power, process and industrial markets. We leverage a workforce of approximately 8,600 highly skilled employees who develop, design and build what we believe are the best engineered solutions to the markets we serve. Building on the heritage of Glenn Curtiss and the Wright brothers, Curtiss-Wright has a long tradition of providing innovative solutions through trusted customer relationships.